



OBSTACLE AVOIDER ROBOTIC VEHICLE

N.M. Walchale

Assistant Professor, Department of Mechanical Engineering, Sanmati College of Engineering, Washim, Maharashtra

ABSTRACT

In today's world ROBOTICS is a fast growing and interesting field. ROBOT has sufficient intelligence to cover the maximum area of provided space. It has an infrared sensor which is used to sense the obstacles coming in between the path of ROBOT. It will move in a particular direction and avoid the obstacle which is coming in its path. Autonomous Intelligent Robots are robots that can perform desired tasks in unstructured environments without continuous human guidance. The minimum number of gear motor allows the walking robot to minimize the power consumption while construct a program that can produce coordination of multi-degree of freedom for the movement of the robot. It is found that two gearmotors are sufficient to produce the basic walking robot and one voltage regulators are needed to control the load where it is capable of supplying enough current to drive two gear motors for each wheel.

Keywords: Wheeled ROBOT, Autonomous, Intelligent, Atmel microcontroller, Gear motor

I. INTRODUCTION

Now a day's Robotics is part of today's communication & communication is part of advancement of technology, so we decided to work on ROBOTICS field, and design something which will make human life today's aspect. There are different types of mobile robots which can be divided into several categories consists of wheeled robot, crawling robot and legged robot. This project deals with a wheeled autonomous ROBOT. It is the part of Automation; Robot has sufficient intelligence to cover the maximum area. This robot uses infrared sensor to detect the obstacle in between the path and then avoid them to completes its objective. The IR transmitter continuously generate an Infrared signal of 38KHz, when an obstacle comes in the path the infrared signal reflected back from the object and is received by the IR sensor TSOP1738 and then generate a positive high signal with the help of the receiver circuit that is there is an obstacle in the path. In such a way the robot is able to detect obstacles of provided space and able to avoid obstacles coming in between the path of ROBOT with the help microcontroller board and complete its journey.

The main motto of designing such type of Robot or the technology is that this technology can be used in today's very fast transportation to avoid the accident generally happen in congested or the Metro Politian Areas by applying emergency break. If we use this technology in the car or any vehicle, it will automatically sense the obstacles then it will take a side to the available free space. An obstacle may be a living things or any object. Autonomous Intelligent Robots are robots that can perform desired tasks in unstructured environments without continuous human guidance. Thus by using this technology in vehicles we make the drivesafe.

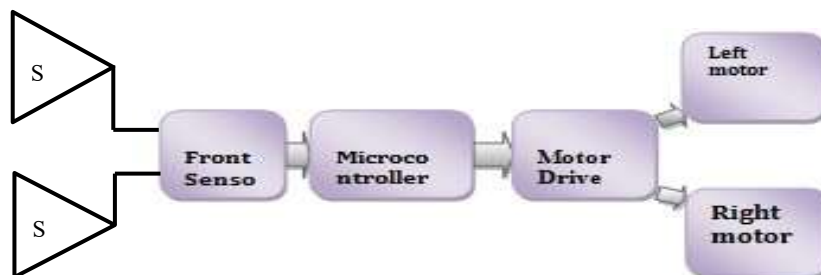


Figure1. Overall Block diagram of the robot

Robot mainly consists of two types of designs-

1. Mechanical design
2. Circuit design.



density non- volatile memory technology and is compatible with the industry-standard MCS-51 instruction set. By combining a versatile 8-bit CPU with Flash on a monolithic chip, the Atmel AT89C2051 is a powerful microcontroller which provides a highly-flexible and cost-effective solution to many embedded control applications.

Motor driver L293D, decide which motor will be in motion or stop in according to the incoming signal from the microcontroller AT89C2051.

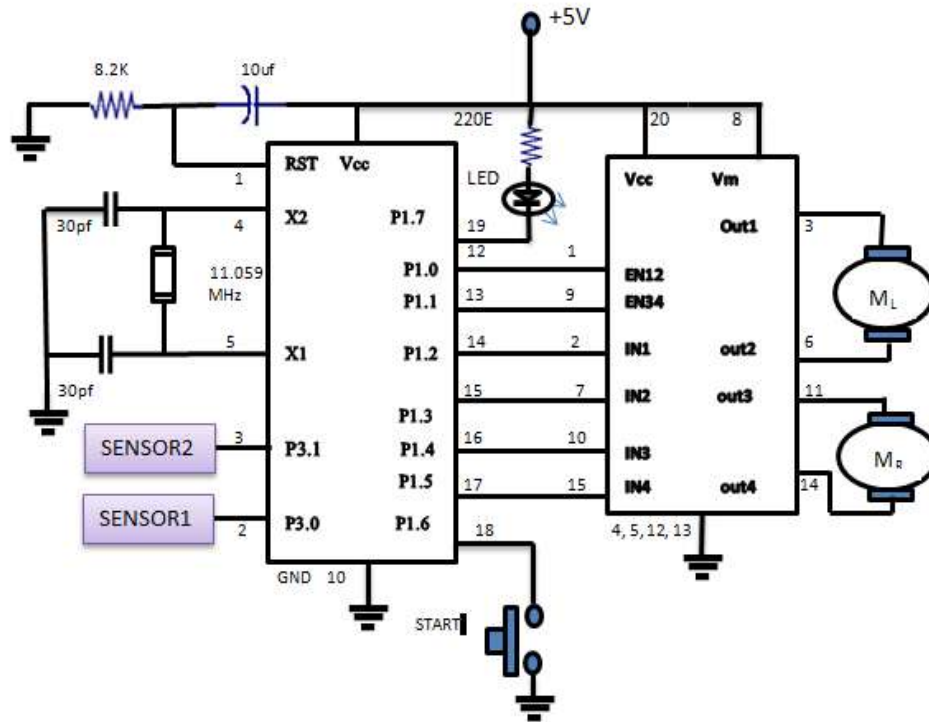


Figure4. Circuit diagram of the control board

There are two sensor S1 and S2 placed at the left and right side of the Robot to sense the obstacle. These sensors may be infrared sensors or ultrasonic sensor depending upon the application. Sensors sense the object then generate a signal high or low then signal is processed by the microcontroller AT89C2051; Microcontroller is programmed to avoid the obstacle, when it gets a signal from sensor then by processing this signal drive the motor driver accordingly, according to the incoming signal of sensors microcontroller decide either left or right motor should move. In such a way the Robot works.

IV. SOFTWARE FRAMEWORK

A brief overview of the software function and the system architecture is shown in Figure 5 to clarify the cyclic phase rotation for robot movement. From the flow chart, the calling sequence and their relationship between the functions are visualized. The algorithm and corresponding flowchart has been shown here.

Algorithm:- 1.Start

2. Check either switch (p1.6) is on or off
3. If on then go to next step4, otherwise rotate at the same step.
4. Initialize the input port (P3) & output port (P1). 5. Set the bit of port pin 1.0 and pin 1.1
6. Read data from port 3.
7. Check the bit on p3.0
8. If bit is present move left motors in Forward direction and stop the right motor, else go to next step 9
9. Check the bit on p3.2
10. If bit is present on pin p3.2, then move right motor in forward direction until we get high signal on pin p3.2 & stop left motor.
11. Again go to step 6.

FLOW CHART

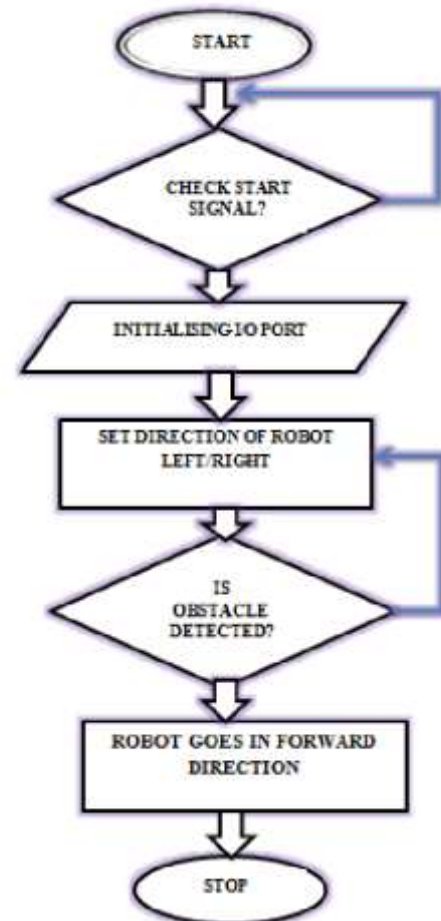


Figure5. Flowchart for the software

V.RESULT: WORKING OF ROBOT

As the robot is switched ON, 1st it will check either start signal is received or not, if not then the program counter will not go to the next address it will remain on the same address until it gets a negative signal. Then the robot continuously checks any obstacle in path, if there is no obstacle then the robot will go straight. If any obstacle is found on the left side then the controller sends a command to the motor drive to stop the right motor & move the left motor and just opposite as obstacle found on the right side.



Figure 6: Robot ready to use



VI. APPLICATION

Obstacle avoiding technique is very useful in real life, this technique can also use as a vision belt of blind people by changing the IR sensor by a kinetic sensor ,which is on type of microwave sensor whose sensing range is very high and the output of this sensor vary in according to the object position changes. This technique makes a blind people able to navigate the obstacle easily by placing three vibrato in left, right and the centre of a belt named as VISION BELT and makes a blind people able to walk anywhere. On top of obstacle avoiding robot temperature/pressure sensors can be added to monitor the atmospheric conditions around. This is useful in places where the environment is not suitable for humans.

Same technology can be used in various applications by modifying the microcontroller program for example

1. Line / Path finder Robot.
2. As automatic vacuum cleaner.
3. With proper programming we can use it as a weightlifter.
4. In Mines

VII. CONCLUSION

From this study, a walking robot that achieved the stated objectives had been developed. This robot is able to produce the basic walking movements using two gear motors. We developed the robot with a very good intelligence which is easily capable to sense the obstacle and by processing the signal coming from the sensor it is perfectly avoiding the obstacle coming in between the path. Robot take the left or right or the forward movement in according to the sensing signal with the help of the two gear motor which makes the movement of the robot smooth. In future, the sensing range can be increased by increasing the sensor quality with the help of ultrasonic sensor or the IR signal spread all over the provide area.

VIII. REFERENCES

- [1] N. SenthilKumar, M. Saravanan, S. Jeebananthan, "Microprocessors & Microcontrollers", Oxford University Press, 4th Edition, 2012, ISBN: 978-0-19-806647-7
- [2] B. Ram, "Fundamental of Microprocessors & Microcontrollers", Dhanpat Rai Publication, Seventh Edition, ISBN: 978-81-89928-60-5
- [3] M. C. Lam, A. S. Prabuwno, H. Arshad, C. S. Chan, "A Real-Time Vision-Based Framework for Human-Robot Interaction", , 7066 *Lecture Notes in Computer Science (Part 1)*, 2011, pp. 257-267, *IVIC2011*.
- [4] T. Ishida, and Y. Kuroki, "Sensor System of a small Biped Entertainment Robot", *Advanced Robotics*, © *VSP and Robotics Society of Japan*, Vol. 18, No. 10, pp 1039-1052, 2004,.
- [5] Maikoto T., Koji Y., and Satoshi E., "Studies on Forward Motion of Five Legs Robot", Journal Code: L0318B 2005, 2P1-S-065, 2005.
- [6] Proceedings of Cooperative Intelligent Robotics in space-II SPIE vol. 1612, Boston, Nov 1991.
- [7] A. R. A Besari, R. Zamri, A. S. Prabuwno, and S. Kuswadi, "The Study on Optimal Gait for Five-Legged Robot with Reinforcement Learning", *Intelligent Robotics and Applications*, , Vol. 5928, pp. 1170-1175, 2009.